


Use SIP Trunk / VoIP Phone Service

How to config Localphone SIP Service on Ecsow Dialer / Voice Broadcast

Step 1, Find your Localphone SIP information.

1, login you Localphone account. Click the Help button in the navigation bar.

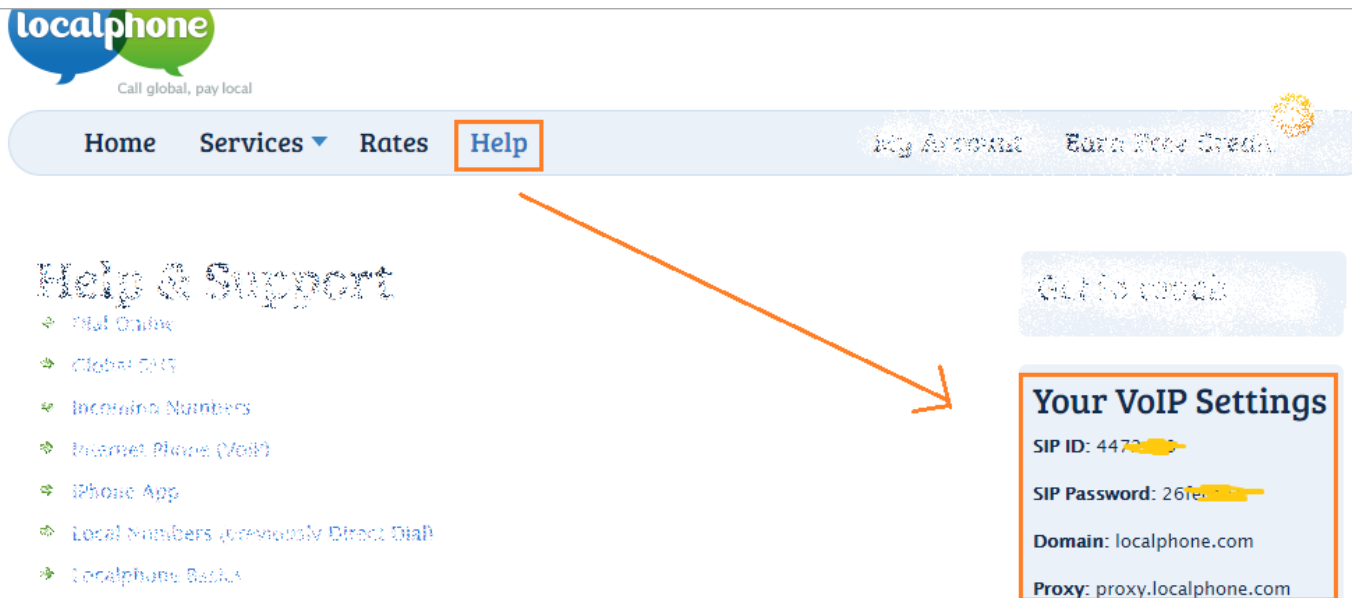

The screenshot shows the Localphone website interface. At the top, there is a navigation bar with links for Home, Services, Rates, and Help. The Help link is highlighted with a red box. Below the navigation bar, there is a 'Help & Support' section with a list of links: Help Center, Global DIDs, International Numbers, Internet Phone (VoIP), iPhone App, Local Numbers (previously Direct Dial), and Localphone Basics. To the right of the Help & Support section, there is a 'Get to work' button. Below the 'Get to work' button, there is a 'Your VoIP Settings' box with the following information: SIP ID: 4472, SIP Password: 26fe, Domain: localphone.com, and Proxy: proxy.localphone.com. An orange arrow points from the Help button in the navigation bar to the 'Your VoIP Settings' box.

You can get the SIP information from "Your VoIP Settings" as above.

Step 2, Setup your SIP account on Ecsow Dialer.

Use SIP Trunk / VoIP Phone Service

Your VoIP Settings

SIP ID: 44724

SIP Password: 26fec

Domain: localphone.com

Proxy: proxy.localphone.com

Options

General SIP Account Do-Not-Call Voice Activity Detection Call Distribution Call Transfer Preset

Account information from your SIP VoIP service provider

Display Name Call Plan A

SIP ID/User Name 44724

Domain localphone.com

Authorization user 44724

Password

Outbound Proxy

Send outbound calls via:

Domain

Proxy

Concurrent Calls

Number of concurrent calls 1

* SIP service must support multiple channels if you want to run concurrent calls

Advanced Settings

OK Cancel

Click OK button to apply the settings.

Unique solution ID: #1031

Author: eva

Last update: 2025-04-30 07:14